

Cincinnati Electronics


NIGHTCONQUEROR 640 280/840 MM

An environmentally sealed, high-performance thermal imager with a dual-FOV motorized lens and a 280/840 mm focal length, the NightConqueror is a true force multiplier. Its staring 2D FPA FLIR technology offers flexibility in a diversity of vehicle mounted, ship-borne, or ground-based configurations, enabling it to operate from marine environments, moving vehicles, and fixed installations, day or night, and in adverse weather. Rugged and impervious, the sealed enclosure protects the high-performance NightConqueror infrared camera to image anywhere, anytime. Possessing superior housing integrity, the camera's target detection, recognition, and identification capabilities are unmatched and undiminished in any situation.



OVERVIEW

- Single input and output connector with remote control via a selectable RS-232/422 serial port.
- Output of the FLIR image is available in RS-170 or CCIR video format or 14-bit Hotlink® digital video.
- Advanced environmental enclosure with superior ruggedization of camera ensures continuous operation in the harshest of vibration and temperature environments.
- Multiple temperature ranges available for optimal scene quality.
- Non-uniformity corrections (NUC) are internally supported for both scene and 3-point, operator guided self-calibration.
- CE's proven technology significantly lowers total life cycle costs.

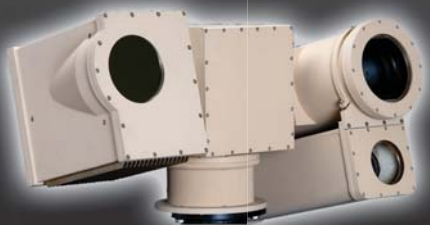

C³ISR > GOVERNMENT SERVICES > AM&M > SPECIALIZED PRODUCTS

Cleared by DoD/OF0ISR for public release under 05-S-2043 on August 22, 2005.

NIGHTCONQUEROR 640 280/840 MM

LONG RANGE THERMAL IMAGER

CAMERA SYSTEM PARAMETERS

Sensor Type: MWIR InSb Reticulated
 Sensor Size: 640 x 512 Pixels, 28 µm Pitch
 Cold Shield: f/6
 Spectral Band: 3.6-5.0 µm with CO₂ Notch
 System Control: RS-422 Serial Interface
 Video Format: RS-170A

LENS PARAMETERS

F/Number: 6.0
 Dual Field of View
 Effective Focal Length:
 Wide FOV: 280 mm (3.7° x 2.8°)
 Narrow FOV: 840 mm (1.2° x 0.9°)
 FOV Change Time: < 1 sec.

POWER REQUIREMENTS

Power Source: 18-32 VDC
 Power at Steady State: < 50 Watts

MECHANICAL / ENVIRONMENTAL

Weight: 45.0 lbs.
 Size (inches): 14.1 L x 12.3 H x 11.2 W
 Operating Temperature: -30°C to 55°C

TYPICAL PERFORMANCE

Cool-Down Time: 5 minutes typical
 Noise Equivalent Temp Difference @ 25°C: 40 mK

FEATURES AND CAPABILITIES

The NightConqueror 640 Long Range Thermal Imager has many advanced features including:

- 1) Local Area Processing: The camera automatically adjusts gain and level for each pixel in the image. No part of the scene will be over or under saturated.
- 2) Auto Focus: The IR imager computes a focus metric and determines a best fit within the local region of interest.
- 3) Electronic Stabilization: A programmable image filter detects sensor motion and eliminates image jitter while allowing normal pan and tilt of the imager.
- 4) E-Zoom: Interpolated electronic zoom is accomplished with an algorithm that interpolates between FPA detector signals to produce an image with enlarged detail and a more natural looking appearance.
- 5) Threshold Based Averaging: Reduces temporal noise that may be visible at increased gain settings – it eliminates the “blur” of other reduction algorithms.

280/840 mm DFOV	Tank		Man		Fields of View	
	280/840 mm DFOV Lens	280/840 mm DFOV Lens	280/840 mm DFOV Lens	280/840 mm DFOV Lens	Full FOV	Instant FOV
Atmosphere	Good Tx ⁽²⁾	Limited Tx	Good Tx ⁽²⁾	Limited Tx	Full FOV	Instant FOV
Target Detection ⁽¹⁾ (NFOV)	37.6 km	32.6 km	17.1 km	15.8 km	1.2° x 0.9°	0.03 mrad
Target Detection ⁽¹⁾ (WFOV)	18.1 km	16.6 km	7.1 km	6.7 km	3.7° x 2.8°	0.10 mrad
Target Recognition (NFOV)	13.4 km	12.2 km	5.2 km	4.9 km	1.2° x 0.9°	0.03 mrad
Target Identification (NFOV)	7.3 km	6.8 km	2.7 km	2.6 km	1.2° x 0.9°	0.03 mrad

1. The standard target model is 2.3 x 2.3 meters NATO panel and 0.75 x 0.75 meters for a standing man. The panel target temperature delta is 1.25°C while the man target temperature delta is taken to be 2°C. 50% probability target detection criteria: 0.75 cycles for detection, 3 cycles for recognition, 6 cycles for identification.

2. The Good Tx atmospheric transmission is 1976 US Standard Model with Rural-Vis=23 km Aerosol and the Limited Tx is Tropical Model with Navy Maritime Aerosol per NVTherm-Sept 2002.

Cincinnati Electronics
 Infrared Products
 7500 Innovation Way
 Mason, Ohio 45040-9699
 Toll Free: 1-800-852-5105
 Tel: 513-573-6744
 Fax: 513-573-6290
 www.L-3Com.com/CE



communications
 Cincinnati Electronics